


B8000/9002




1001 - 250cm (RAL-)

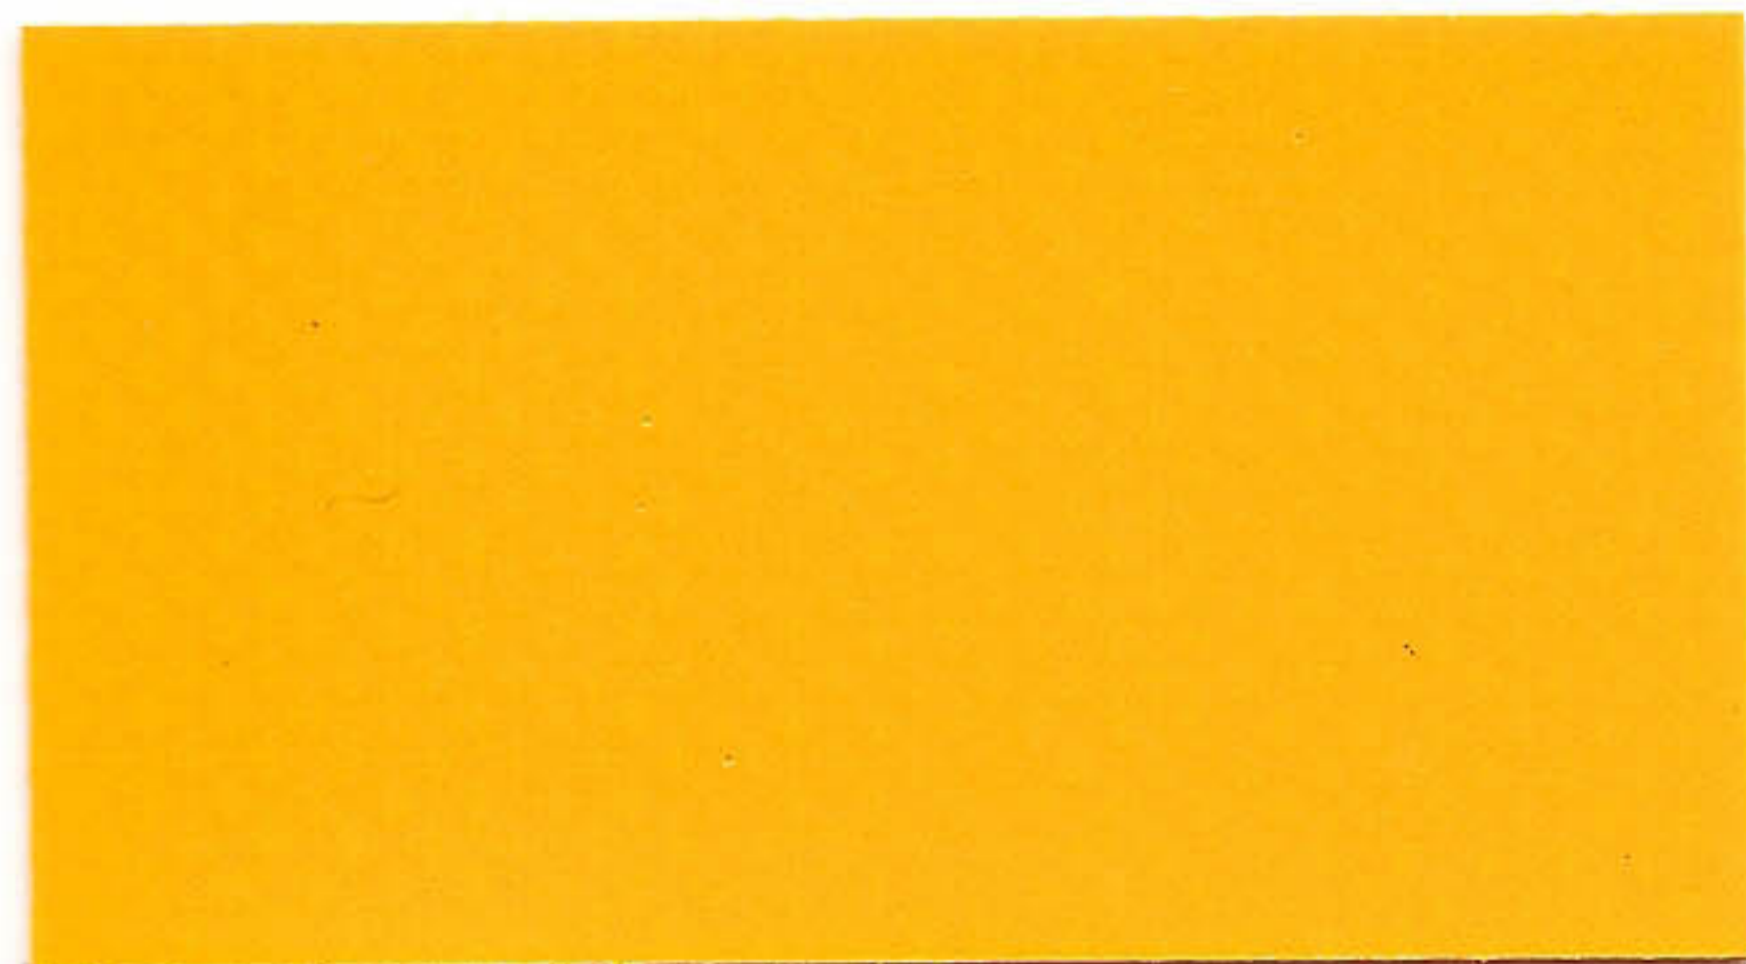


1018 - 250cm (RAL1018)




1021 - 250cm (RAL1021)

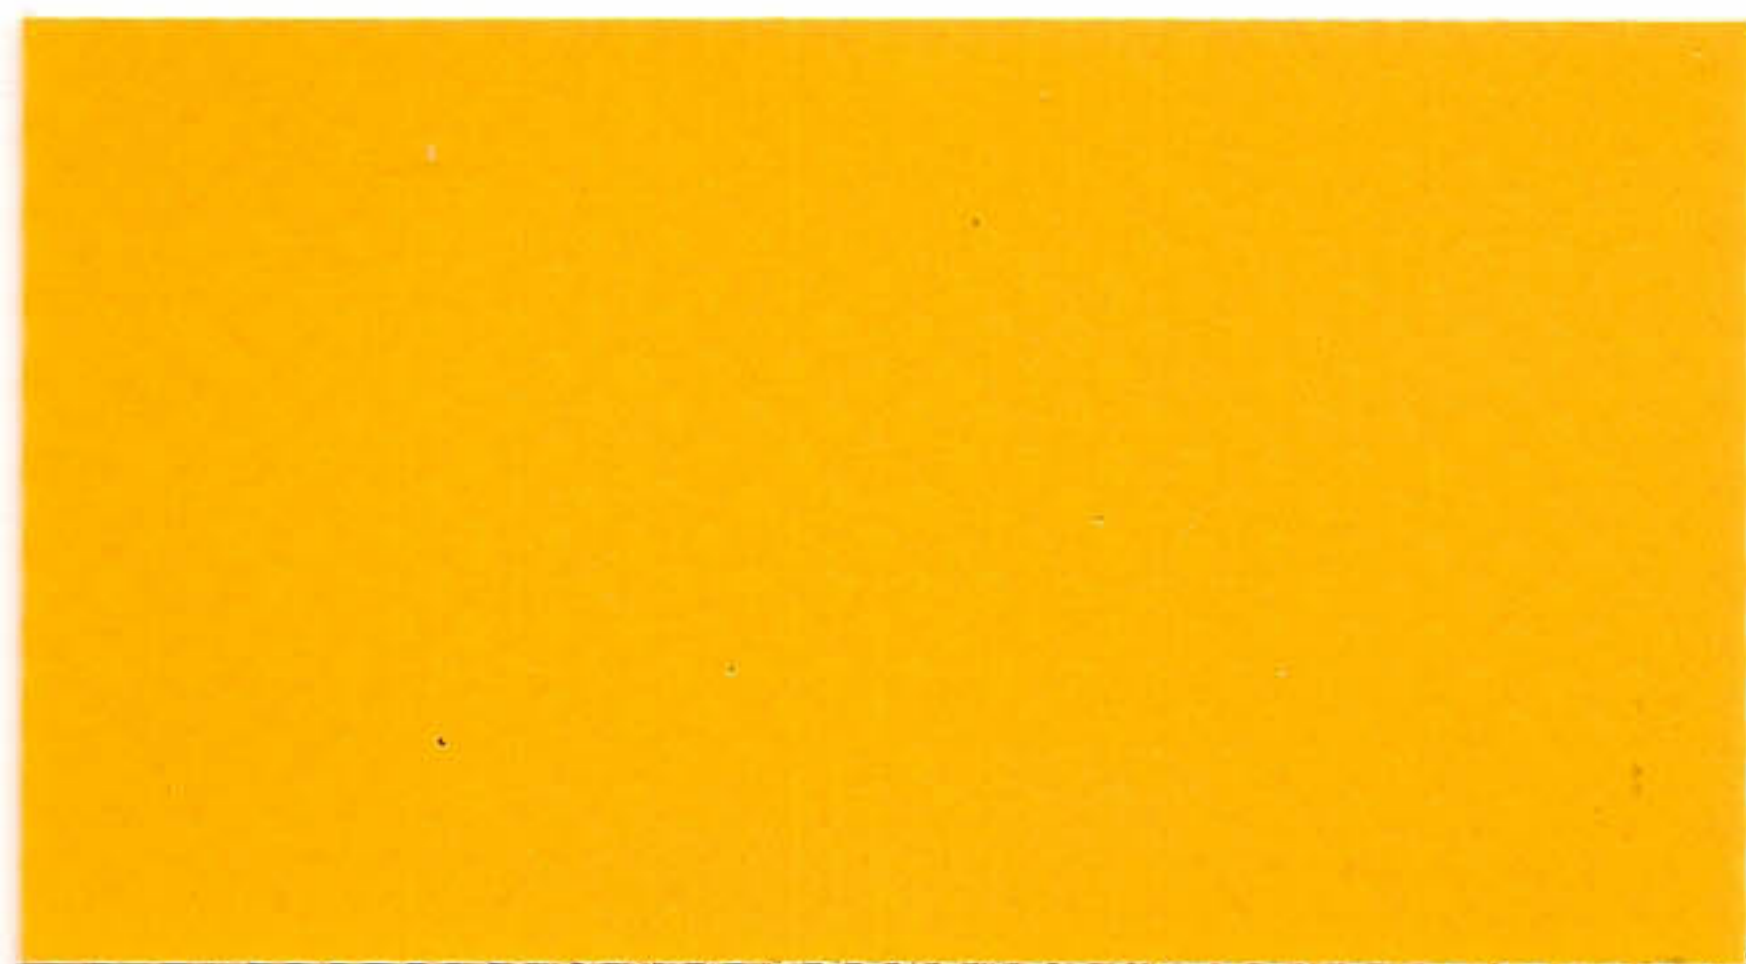


1024 - 250cm (RAL1003)

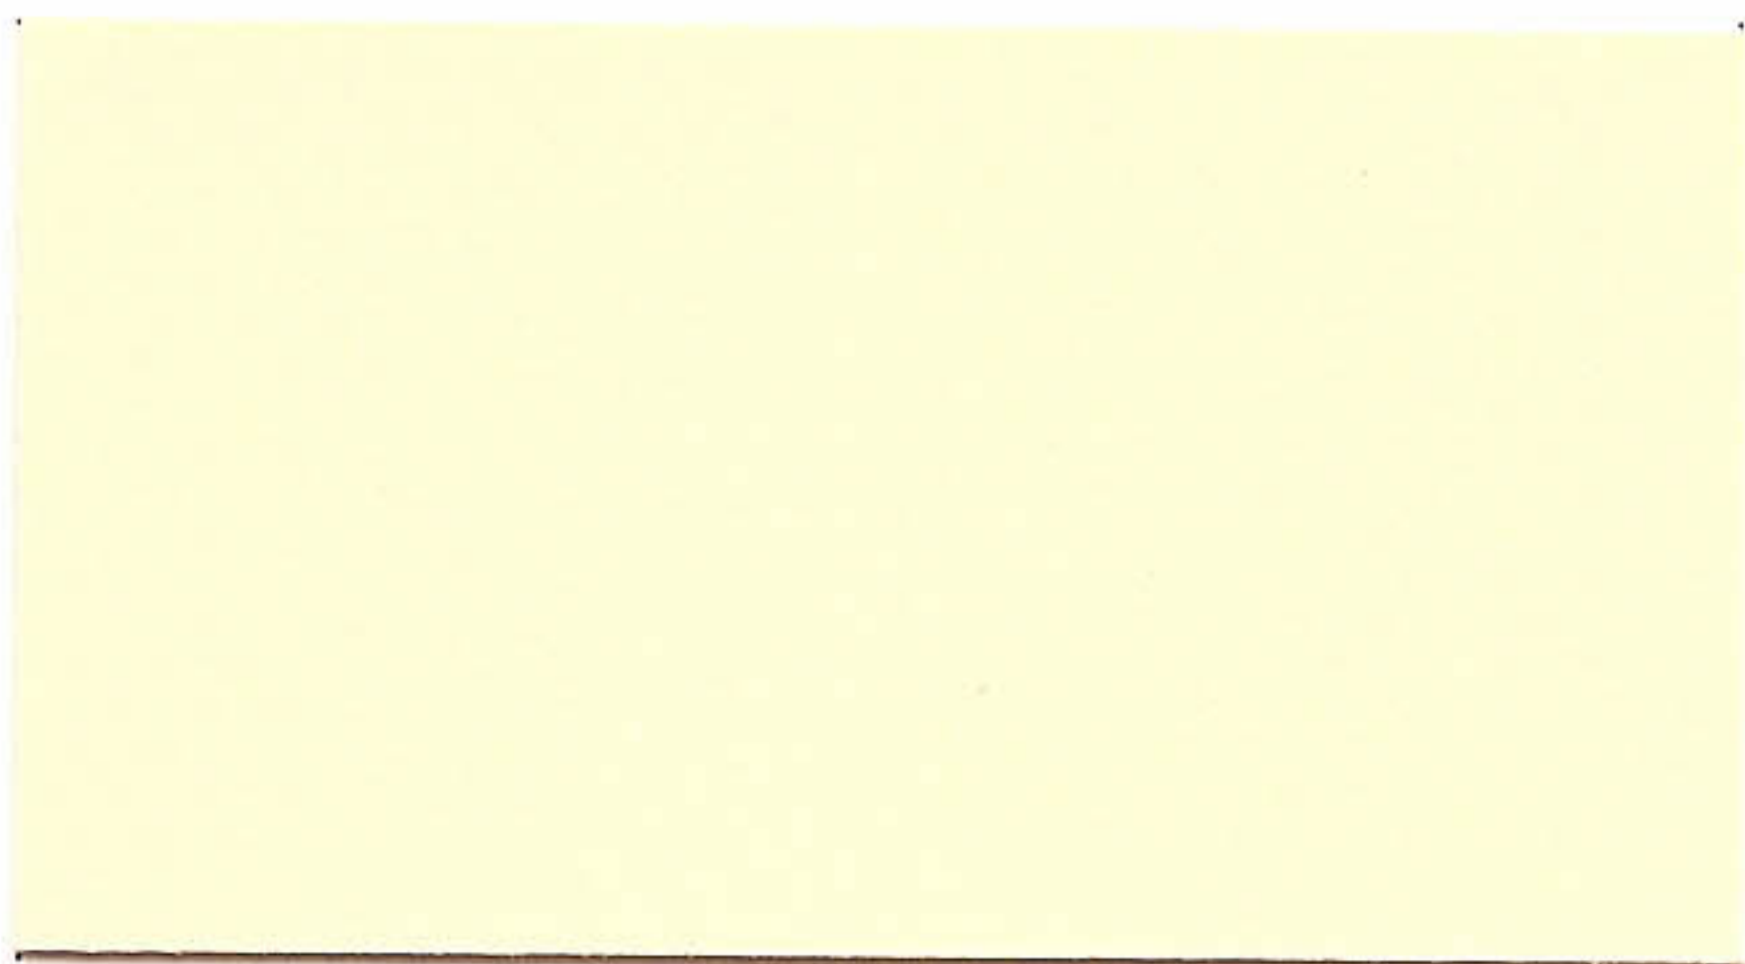


1623 - 250cm (RAL-)

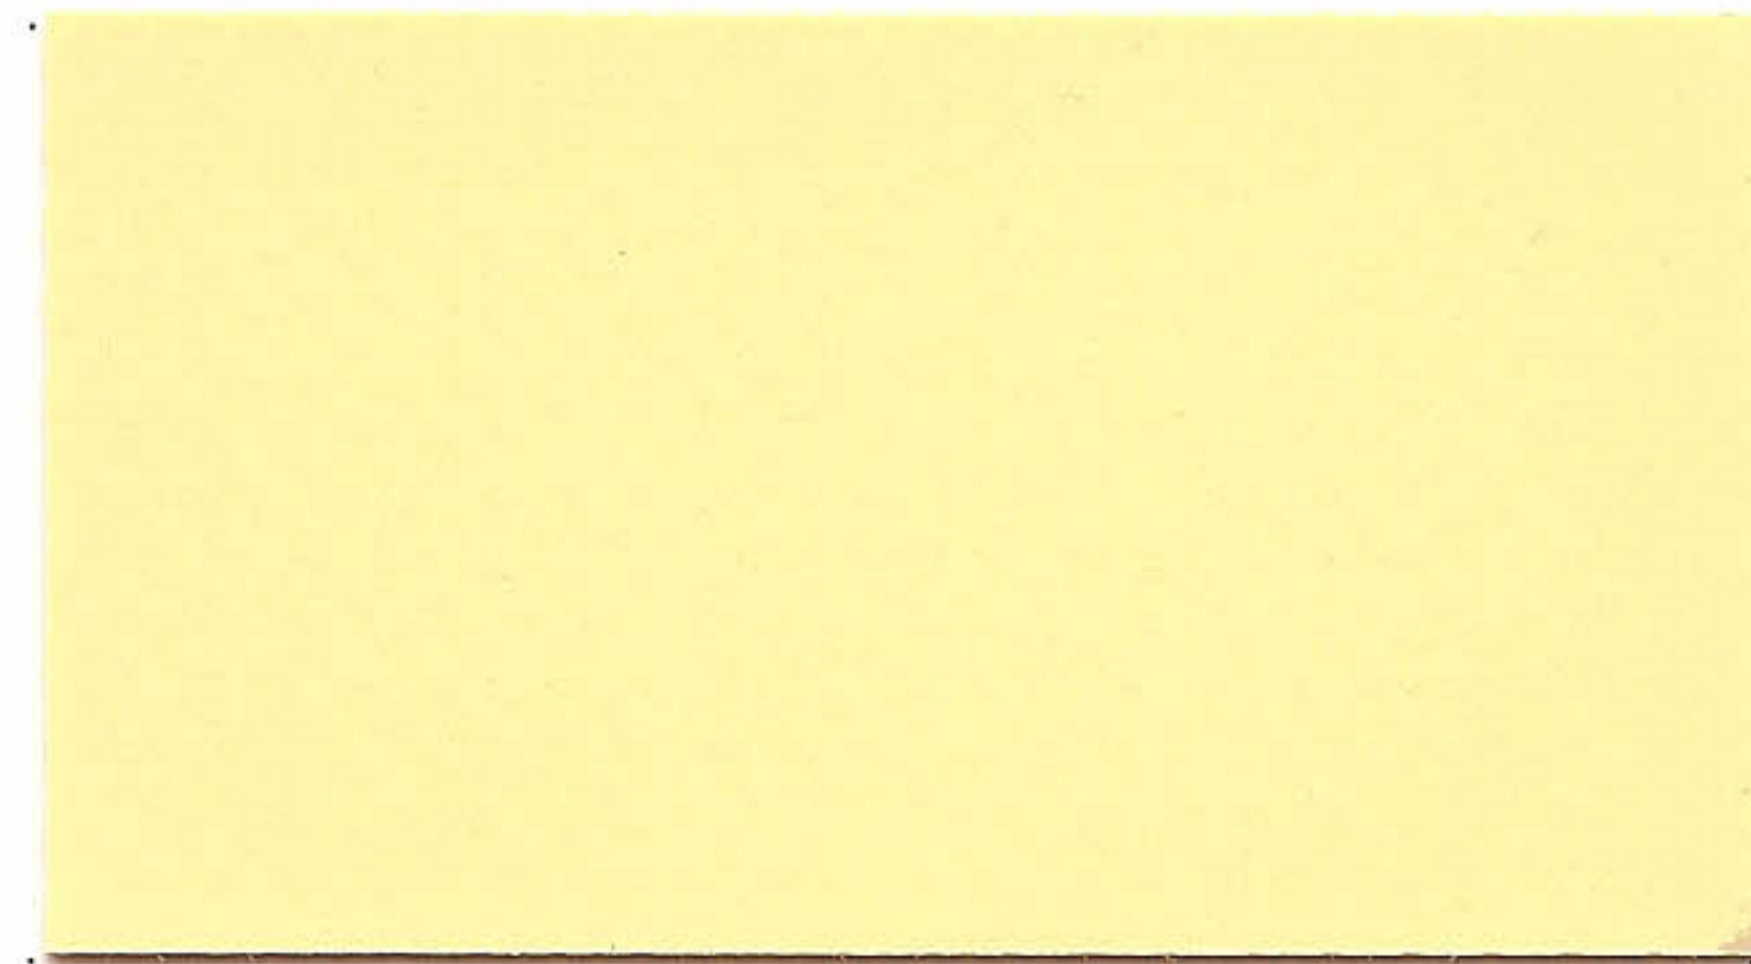


1652 - 250cm (RAL-)

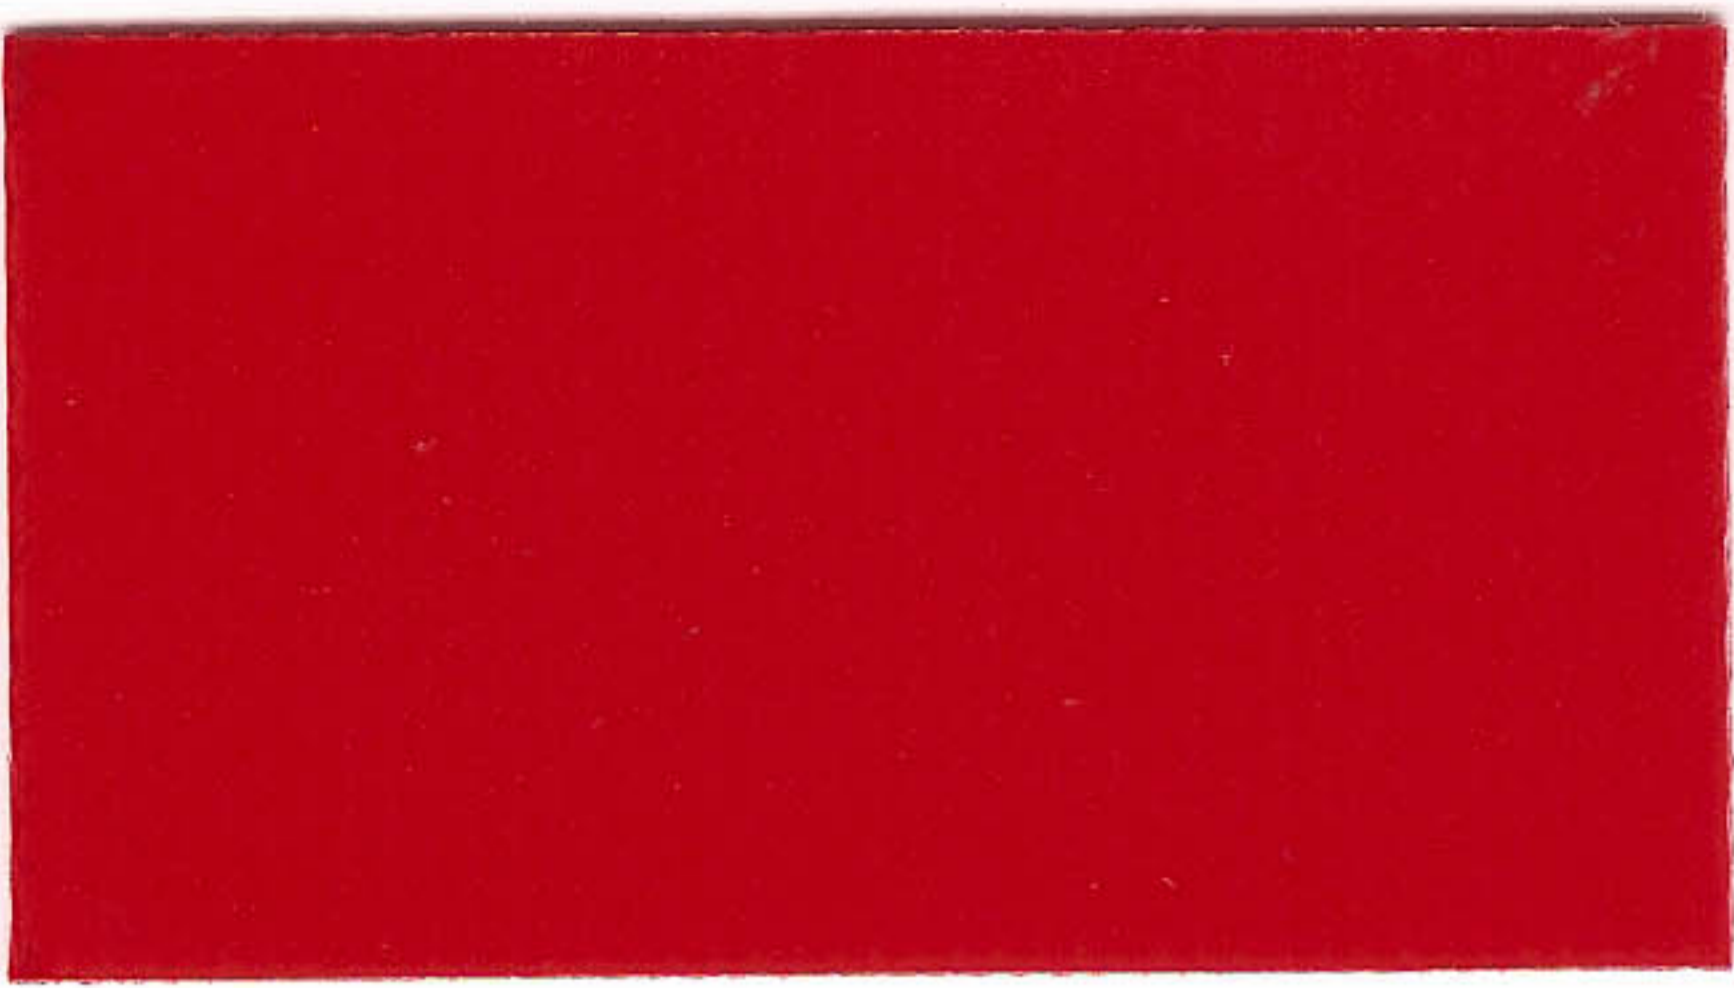


3001 - 250cm (RAL-)

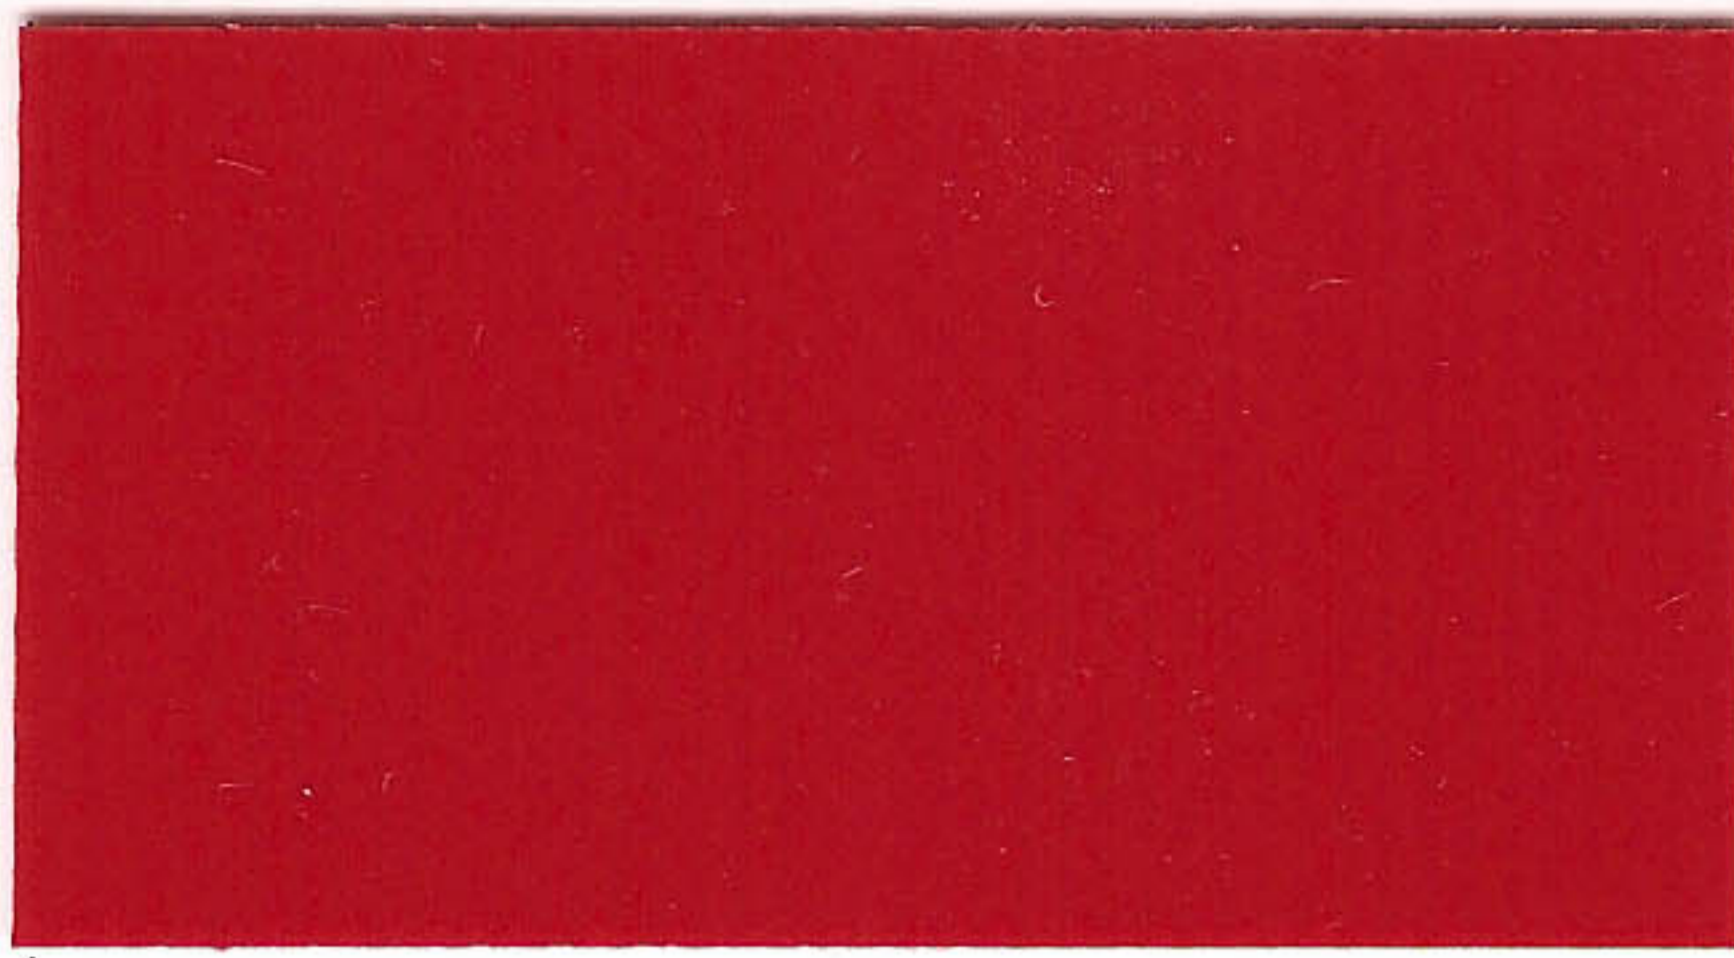


3015 - 250cm (RAL3002)

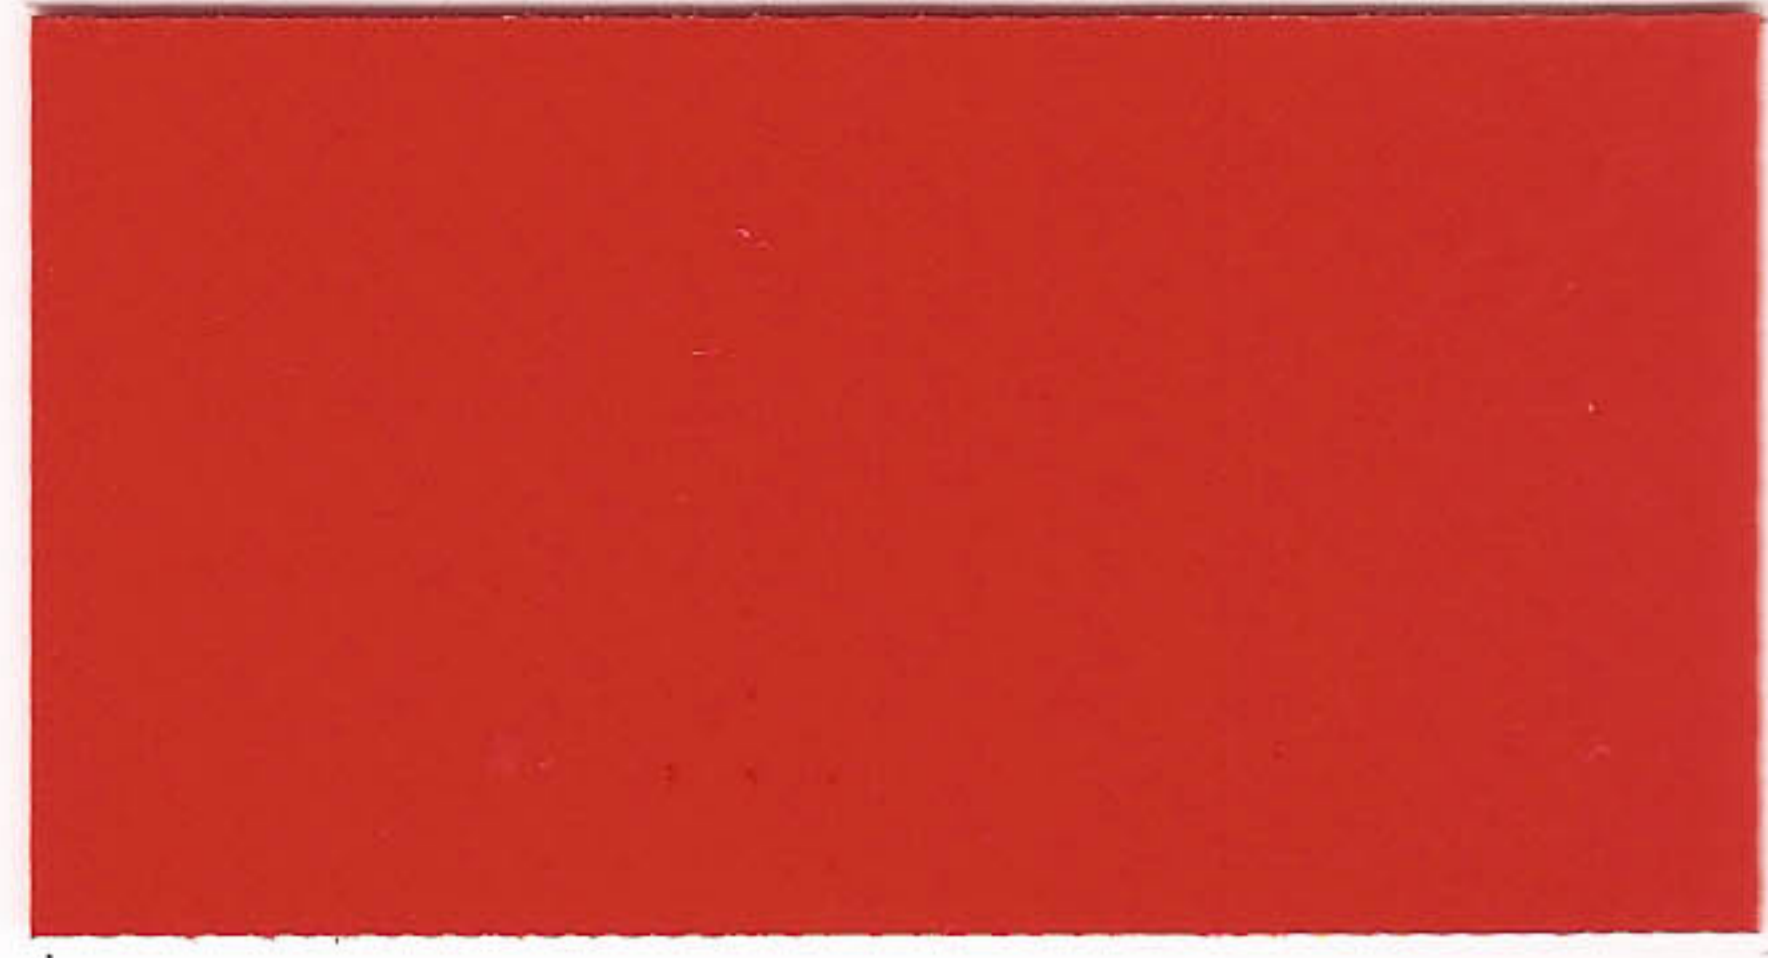

3018 - 250cm (RAL-)

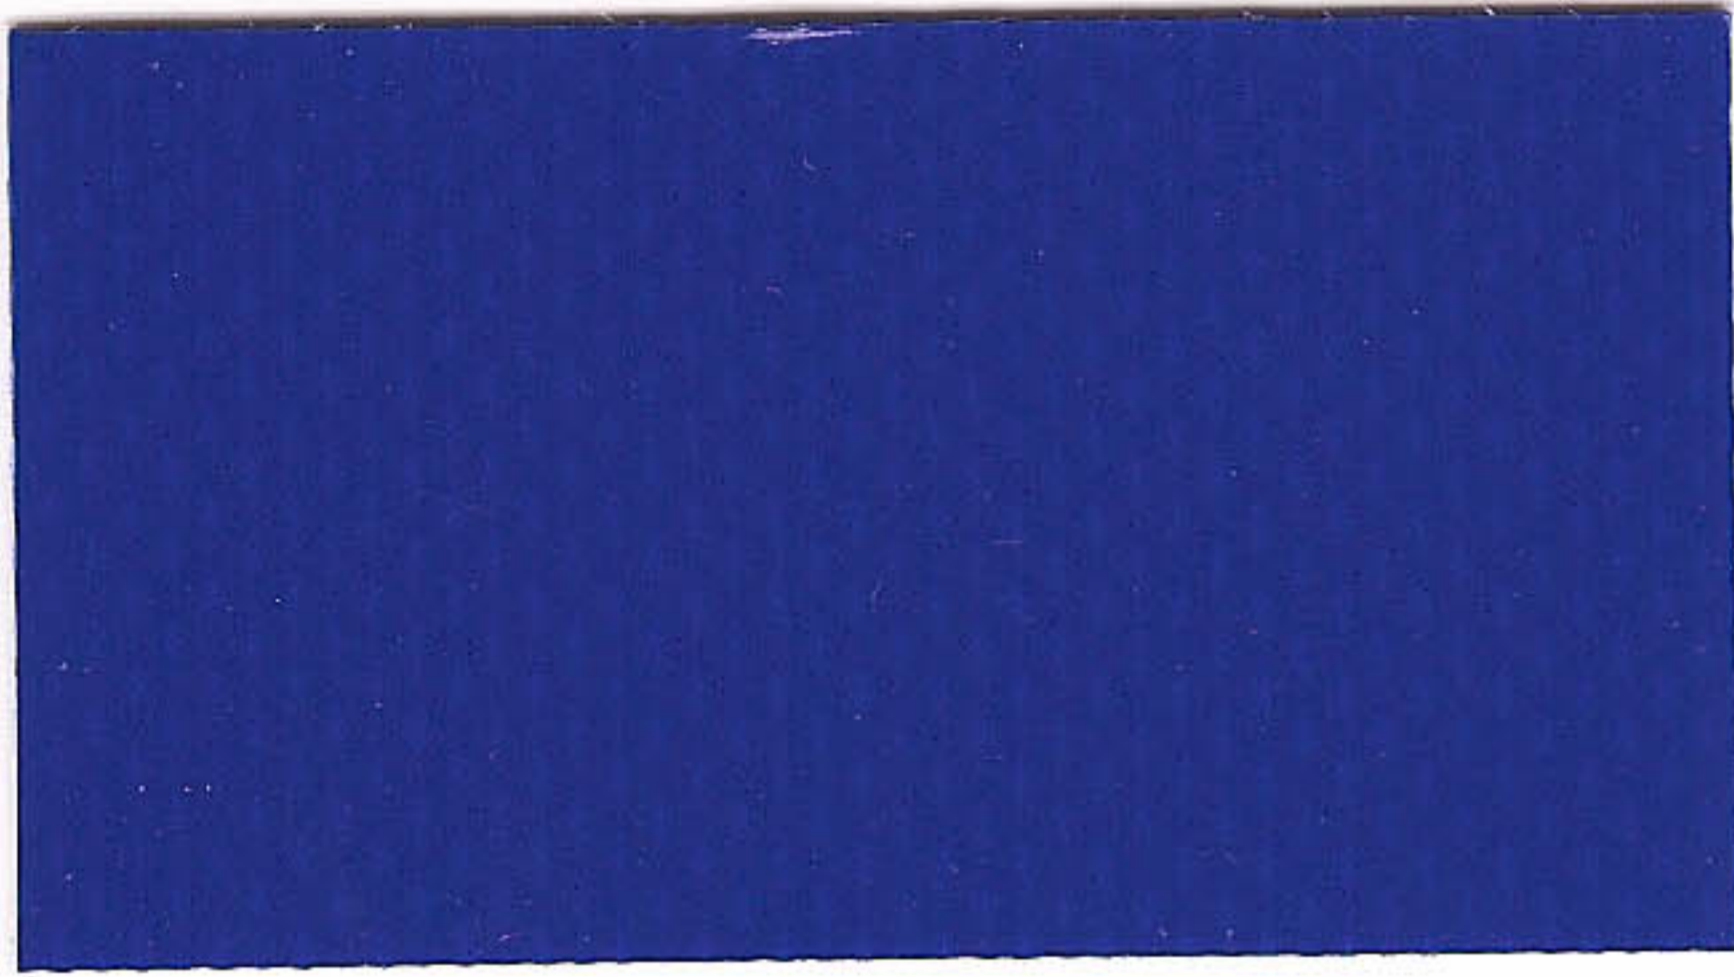

5001 - 250cm (RAL-)

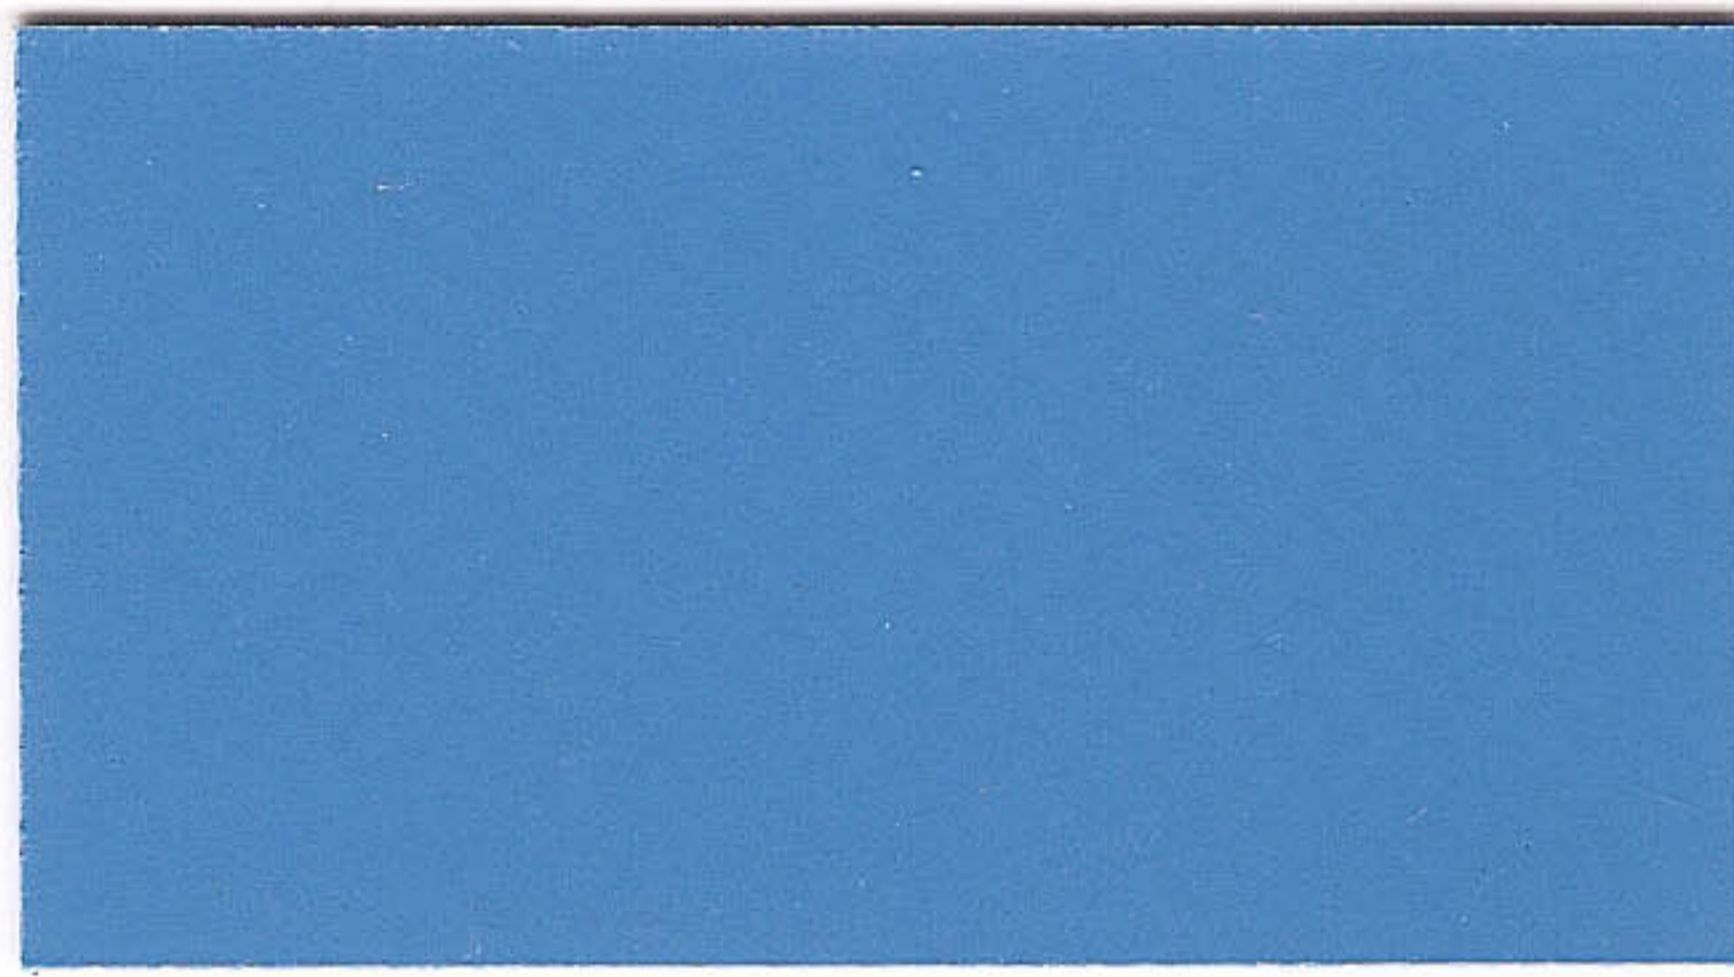


5003 - 250cm (RAL5012)



5007 - 250cm (RAL-)



5020 - 218, 250cm (RAL-)

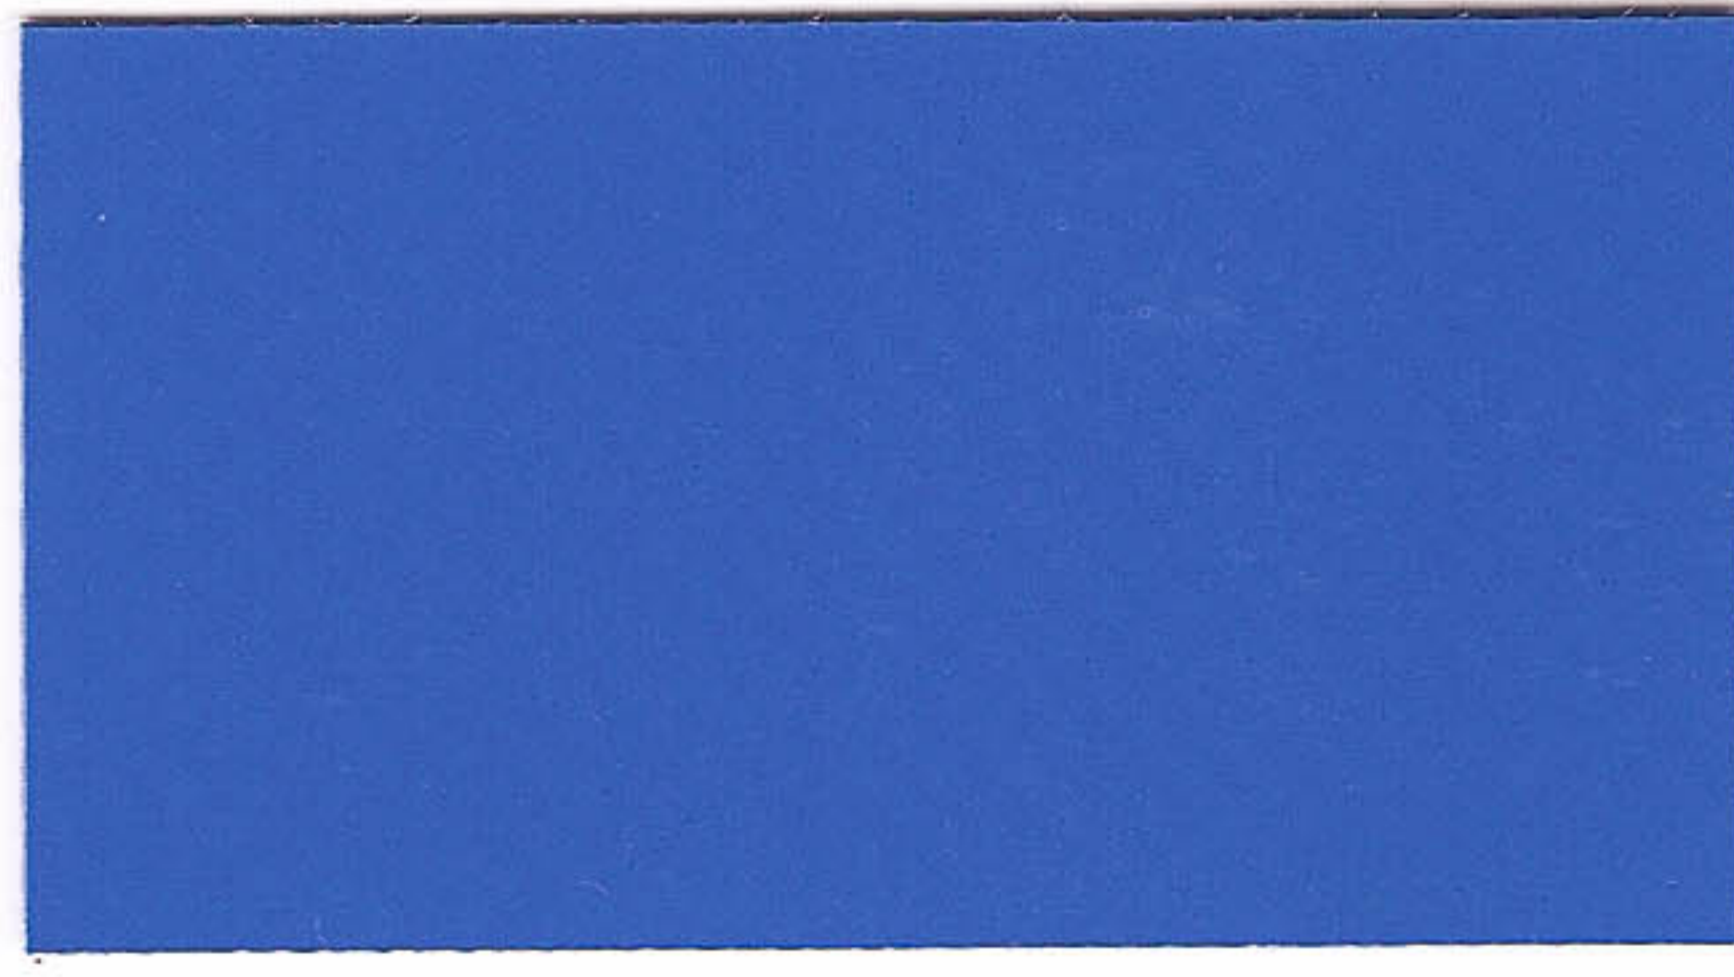

5029 - 218, 250cm (RAL-)



5032 - 250cm (RAL-)




5038 - 250cm (RAL-)




6001 - 218, 250cm (RAL-)




6047 - 250cm (RAL-)

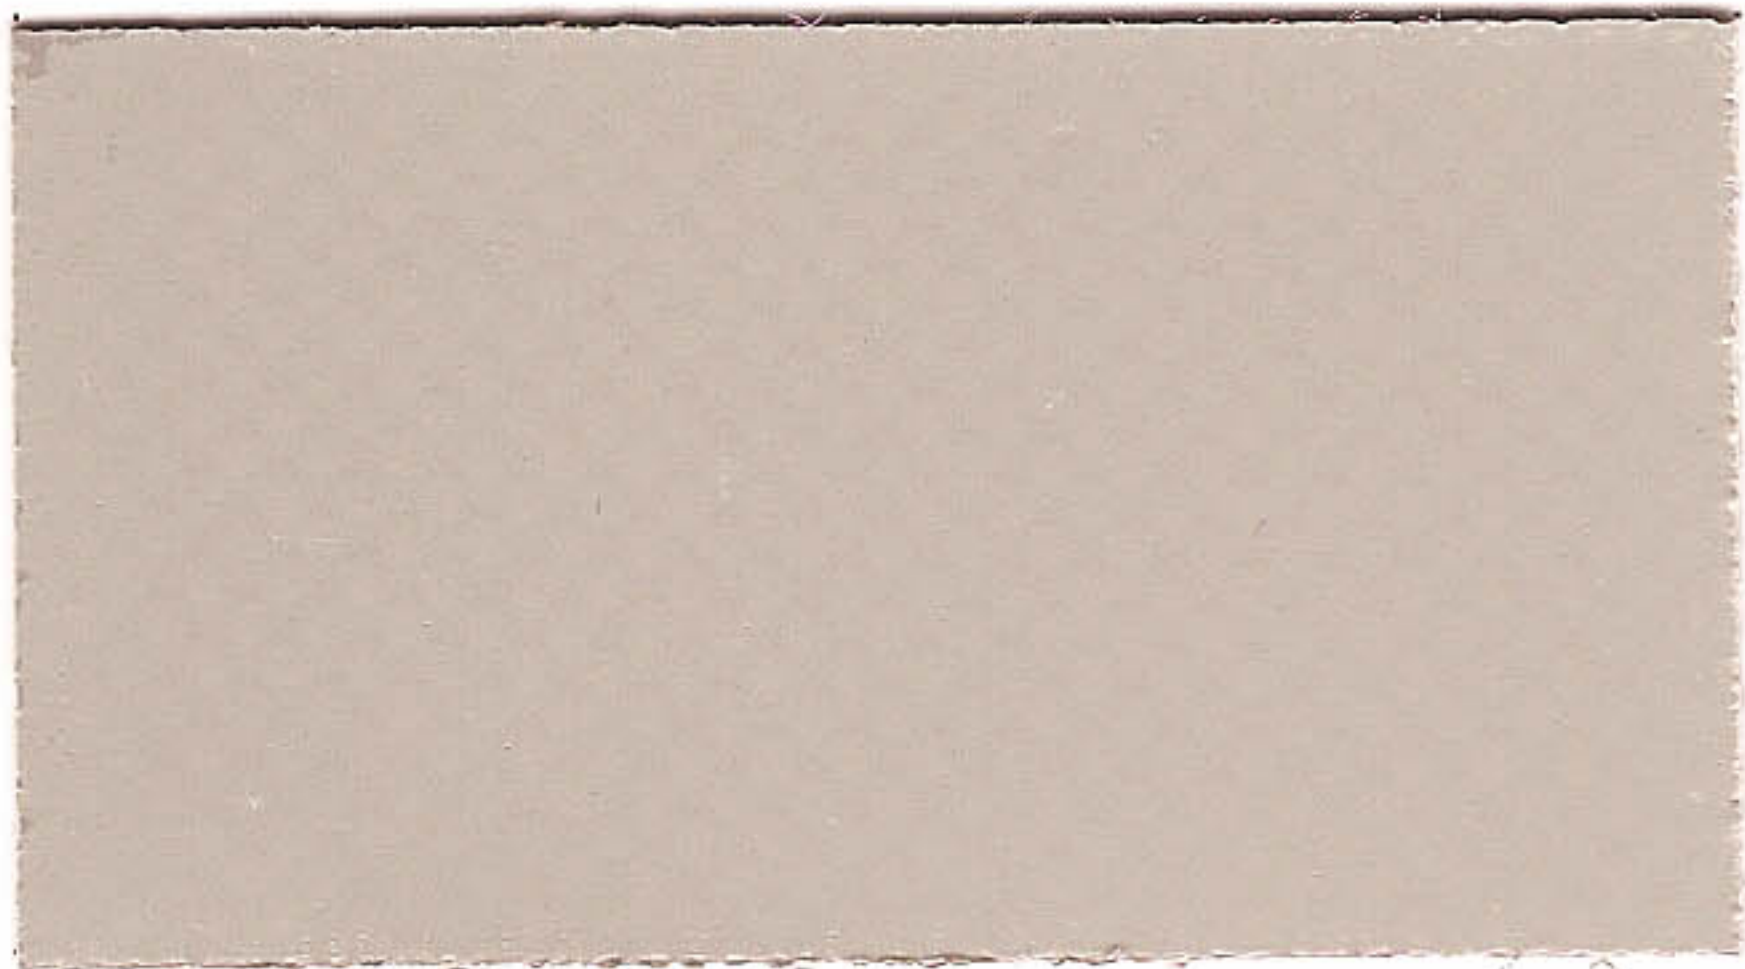

7001 - 218, 250cm (RAL-)

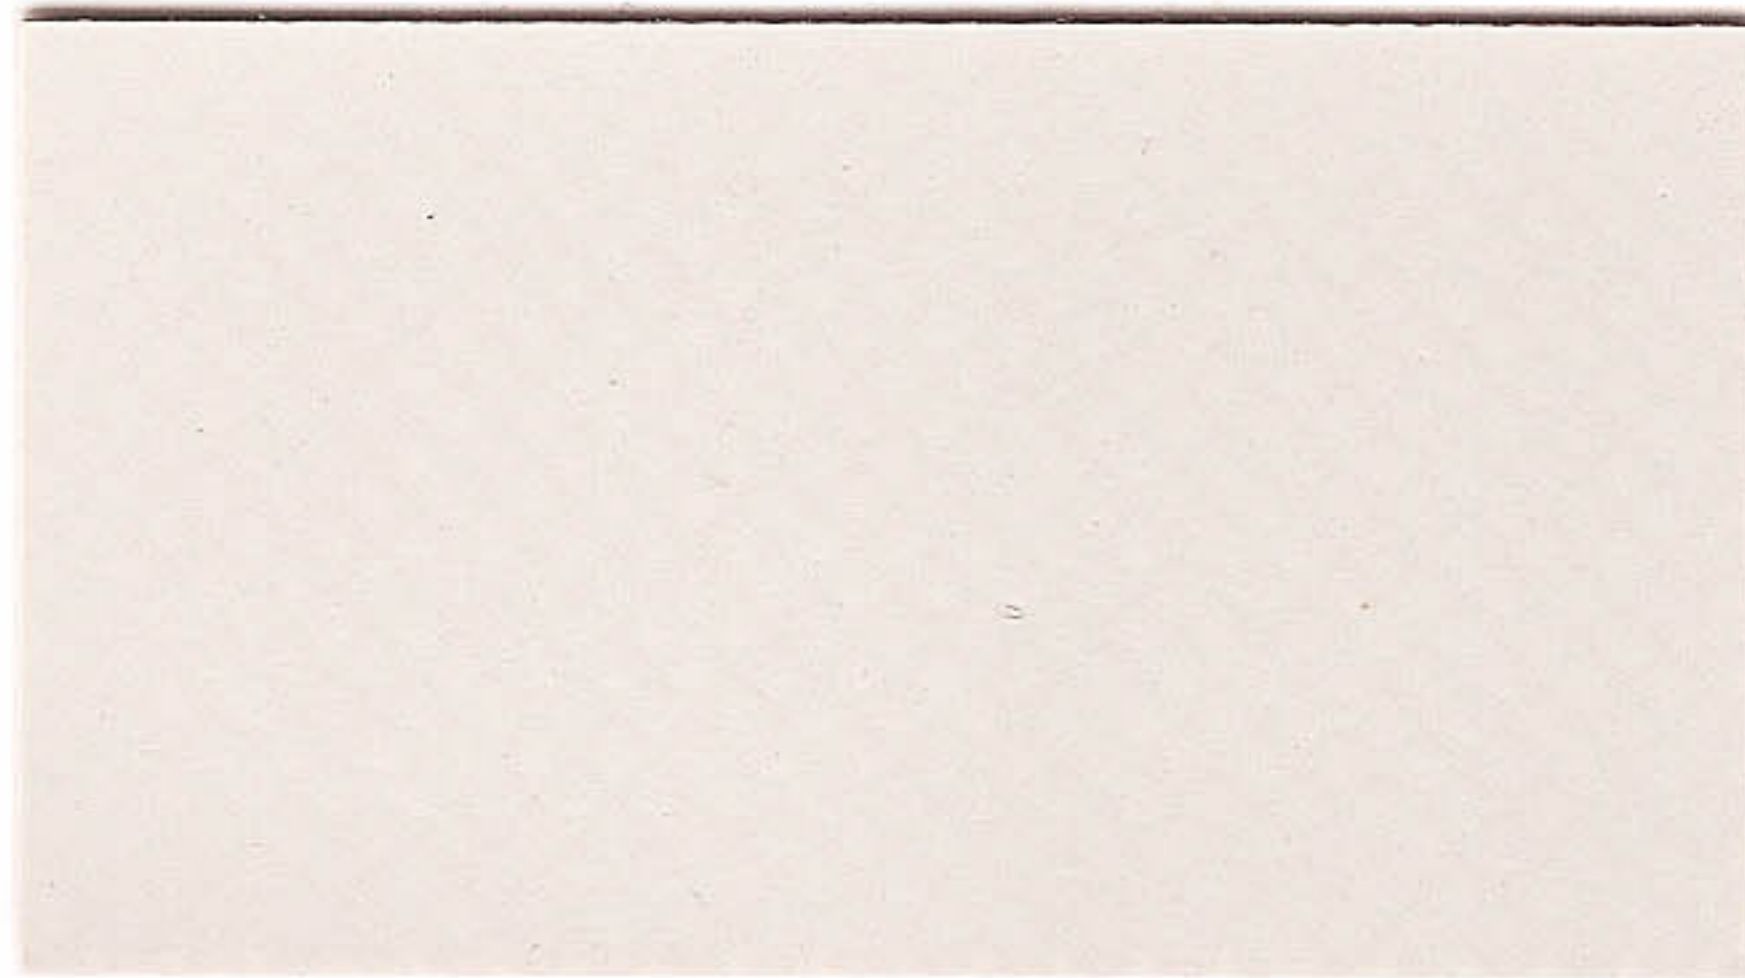

7002 - 250cm (RAL7035)

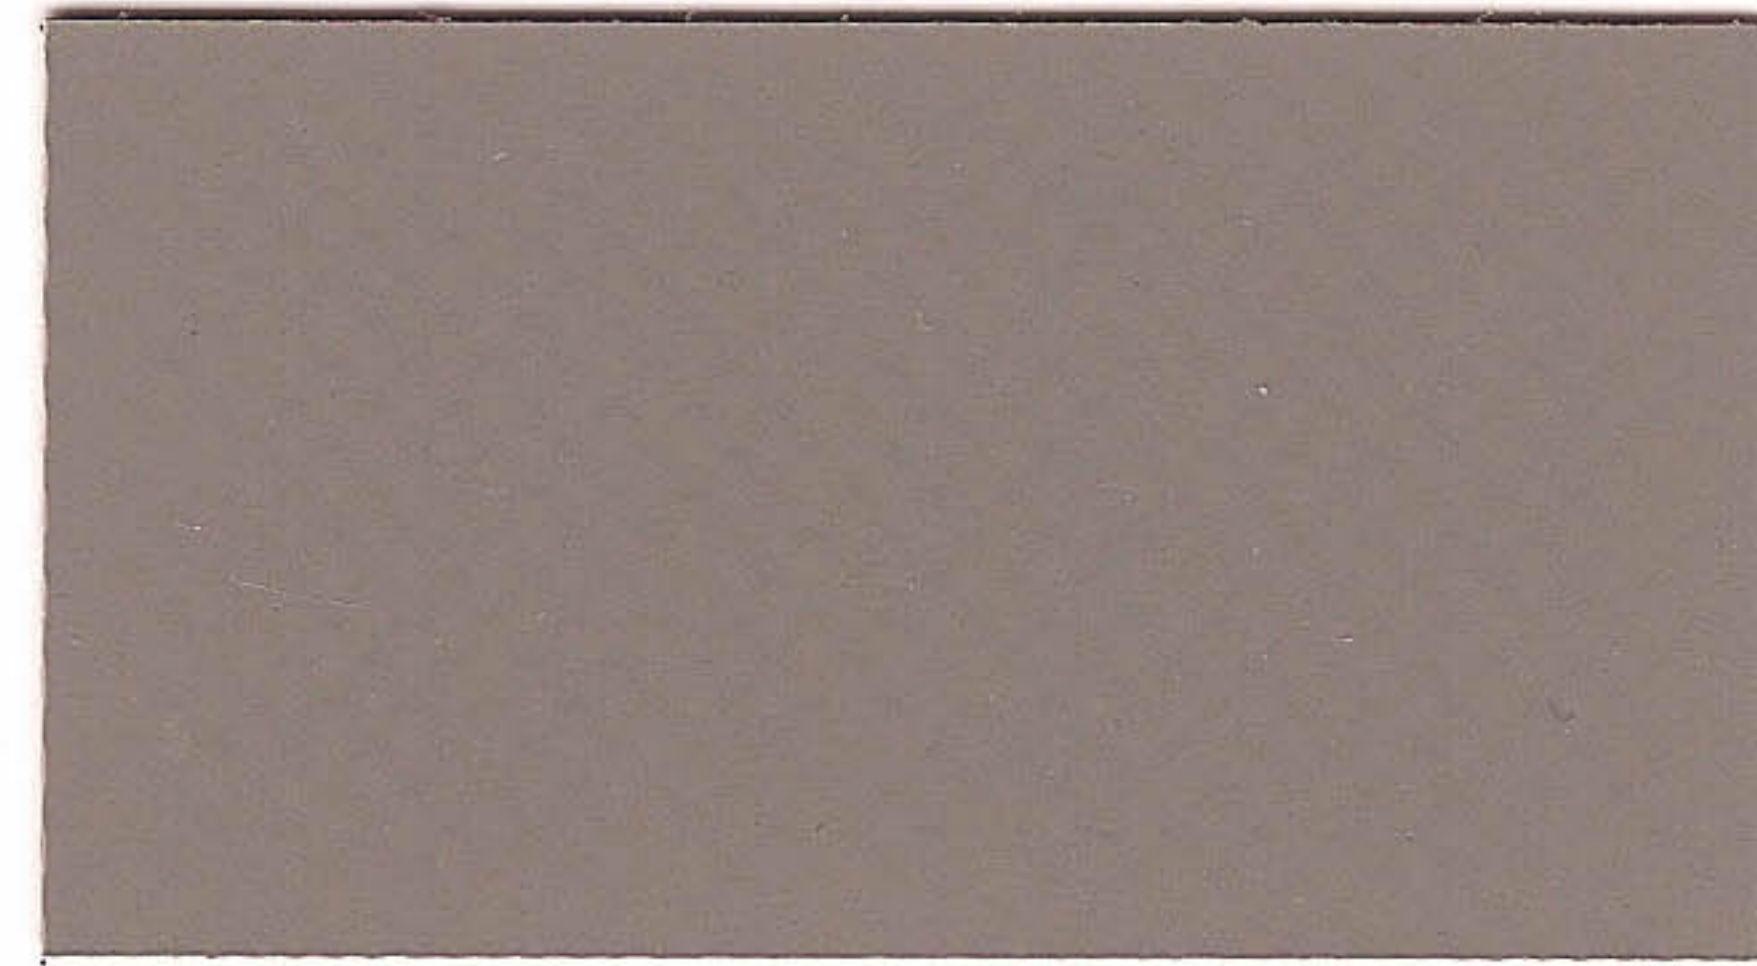

7024 - 250cm (RAL-)



7060 - 250cm (RAL-)




7500 - 250, 300cm (RAL9006)



7999 - 250cm (RAL-)



8020 - 250cm (RAL8017)

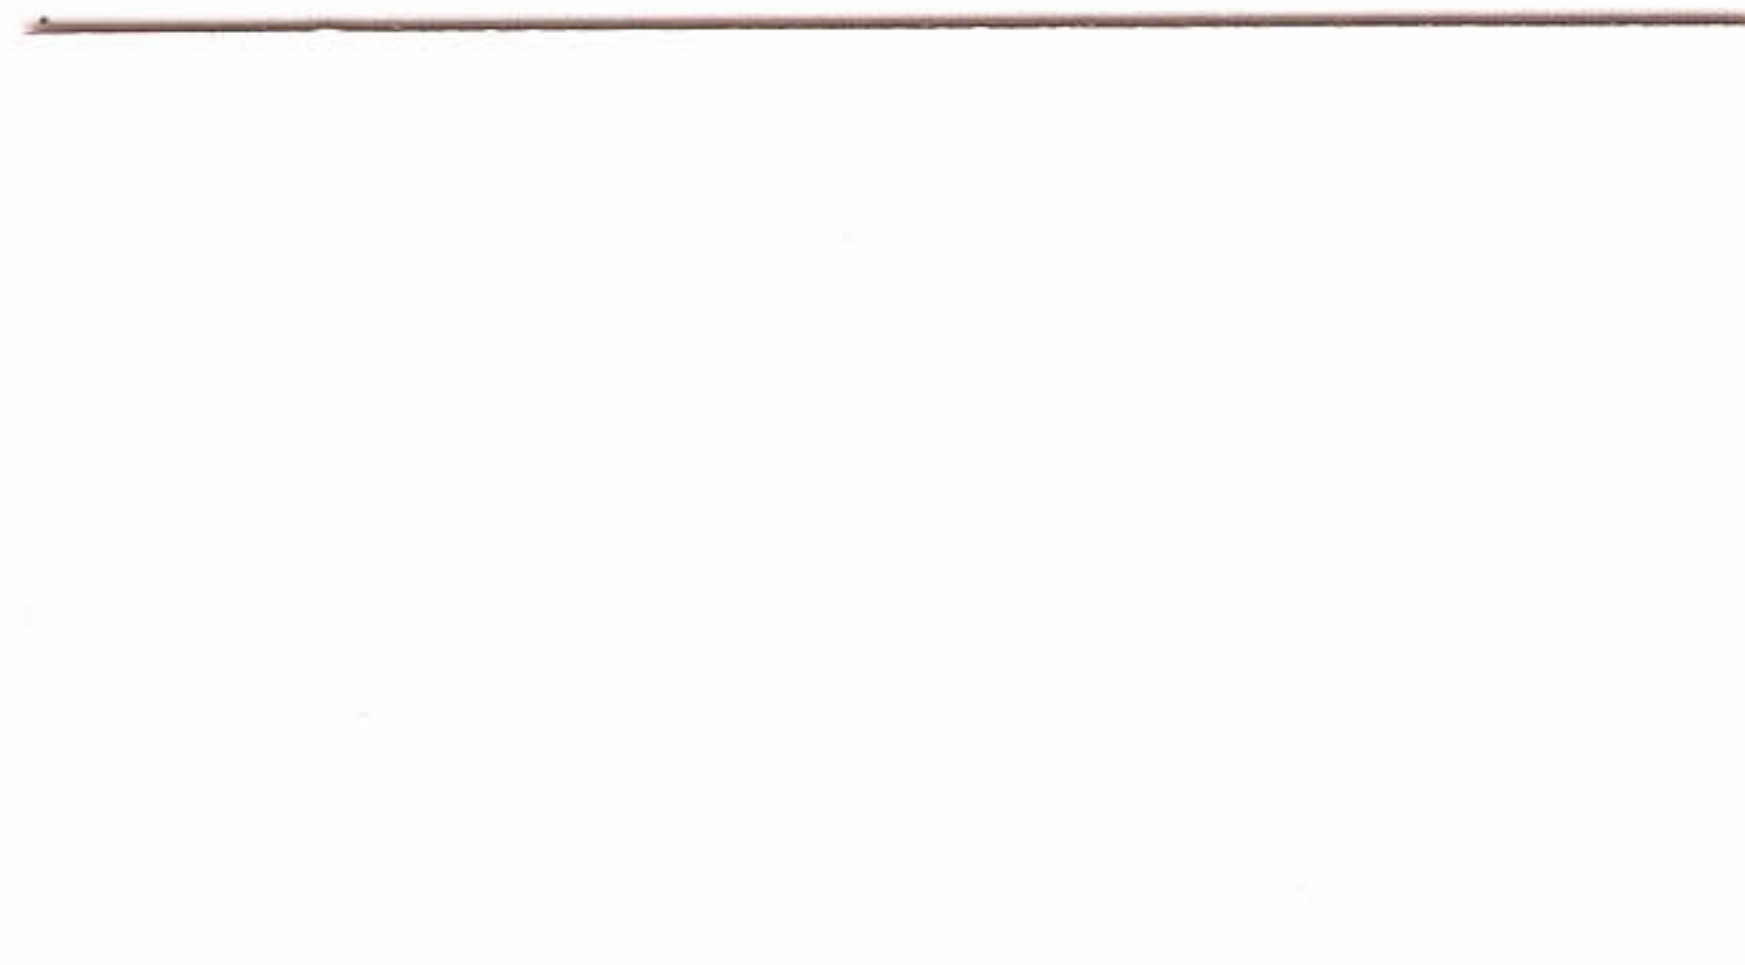

9002 - 150, 218, 250, 300, 320cm (RAL-)

| | | | |
|---|---|-----------------------|-----------------------|
| weefsel/tissu/fabric Gewebe/tejido | | 100% PES 1100 dtex | |
| coating/enduction Beschichtung/revestimiento | | PVC | |
| gewicht/poids/weight Gewicht/peso total | | 630 g/m ² | DIN EN ISO 2286-2 |
| vernislacquer/Lackierung/lacado | | 1/1 | |
| kalander/calandre/Embossing/kalander | | Glossy | |
| treksterkte résistance rupture breaking strength Höchstzugkraft resistencia a la ruptura | ketting/warp/chaîne Kette/urdimbre | 2500 N/5cm | EN ISO 1421 meth 1 |
| | inslag/weft/trame Schuß/trama | 2300 N/5cm | |
| scheurweerstand résistance à la déchirure tear strength Weiterreißfestigkeit resistencia a la rasgadura | ketting/warp/chaîne Kette/urdimbre | 270 N | DIN 53 363 |
| | inslag/weft/trame Schuß/trama | 270 N | |
| hechting/adhérence/adhesion Haftung/adherencia | | 90 N/5cm | EN ISO 2411 |
| temperatuurbestendigheid tenue à la température temperature resistance Temperaturbeständigkeit resistencia a la temperatura | | -30 °C/+70°C | DIN EN 1876-2 |
| lichtechtheid tenue à la lumière light fastness Lichtechtheit resistencia a la luz | (uitgezonderd wit en (semi-) transparant) (excepté en blanc et (semi-) transparent) (except white and (half-) transparent) (außer Weiß und (Semi-)transparent) (excepto blanco/(Semi-)transparente) | 7-8 | ISO 105 B02 |
| onbrandbaarheid/inflammabilité flammability/Flammbarkeit/inflamabilidad | | <100 mm/min | ISO 3795 |
| toepassing application application Anwendung aplicación | truck-covers bâches camions truck covers LKW-Planen lona para camión | | |